

# STABLE AND EFFICIENT PERFORMANCE

## 4CH DIGITAL VIDEO RECORDER LE1004




### SPECIFICATIONS

Model		LE1004	
Signal System		NTSC	PAL
Video	Input	4	
	Output	Composite	1
		VGA	1
	Spot	1	
Audio	Input	1	
	Output	1	
Alarm	Input	4	
	Output	1	
Recording	Frame Rate (/sec)	Up to 120 fps @ 352x240 Up to 60 fps @ 704x240 Up to 30 fps @ 704x480	Up to 100 fps @ 352x288 Up to 50 fps @ 704x288 Up to 25 fps @ 704x576
	Pre-Event Recording	Up to 5 Seconds	
Search	Playback Function	FF, FB	
	Search Function	Calendar / Event	
Display	Frame Rate (/sec)	120 fps	
	Division Mode	1, 4	
Storage	Internal HDD	SATA	
	Interface Type	1TB (Up to 1 HDD)	
Backup	Backup Interface	USB 2.0	
	Supportable Devices	USB Memory Stick	
Serial I/F	PTZ Control Interface	RS-485 / RS-422	
Network	Network Connection	10/100Base-Tx (RJ-45)	
	NTP (Network Time Protocol)	Yes	
Security	User Level Management	Yes	
Power Source		Adaptor 12V/5A	
Operating Temperature / Humidity		0°C ~ 40°C / 10% ~ 80%RH (Non-Condensing)	
Weight (w/o HDD)		2.4 Kg	
Dimension (W x D x H)		320 x 247 x 59 mm	

\* Exact products and specifications shown may vary by geographic region and are subject to change without notice. Actual products may differ from the images appearing in the catalog.

### DIMENSION

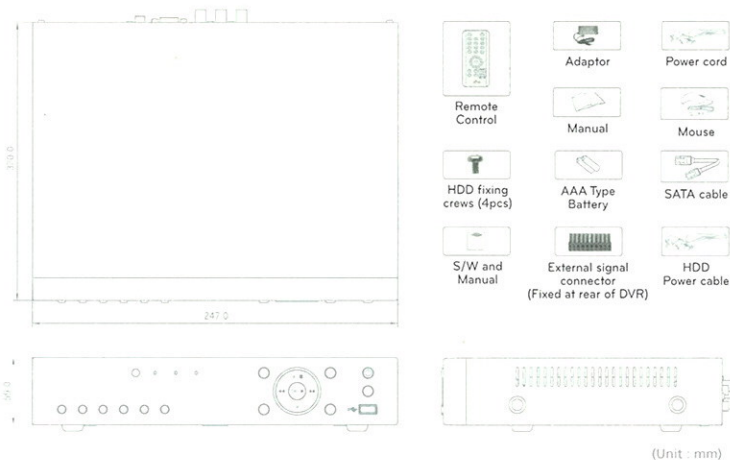

### FEATURES

- Multiplex (Simultaneous Monitoring / Recording / Backup / Network)
- Various Recording Resolution (352x240, 704x240, 704x480)
- Small File Size by H.264 Video Compression
- VGA / BNC / SPOT Output Support
- Up to 120fps@CIF Recording
- User Friendly GUI
- Time and Date Sync from NTP Server



The eco-friendly label is attached to those products which have passed LG Electronics' rigorous environmental criteria that evaluate 6 hazardous materials (lead, mercury, cadmium, etc.)



#### Business Solutions Company

**Security Business Team**  
 LG Twin Towers, 20 Yeouido-dong,  
 Yeongdeungpo-gu, Seoul 150-721, Korea  
 Phone : +82-2-3777-5184  
 Fax : +82-3777-5185  
<http://www.lg.com/global/security>  
 E-mail : lgsecurity@lge.com

